

DuraLabel[®] 2000

QuickStart Guide



1-800-788-5572

International: +1 503-644-5572



info@GraphicProducts.com

www.GraphicProducts.com

www.DuraLabel.com

1. The BATTERY

INSERTING & REMOVING THE BATTERY

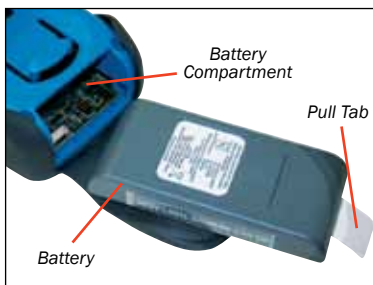

1. Pull up and out on the end of the rubber *battery compartment flap* on the bottom of the printer to open the *battery compartment*.

2. Slide the *battery* into the *printer* until it snaps into place.

▶ **NOTE:** The *printer* automatically turns on when the *battery* is installed.

3. Close the *battery compartment flap*.

4. To remove the *battery*, open the *battery compartment flap* and pull gently on the *pull tab* at the end of the *battery* until it freely slides out.

▶ **NOTE:** Do not remove the *pull tab*.


▶ **CAUTION:** Always power down the *printer* before removing the *battery* to prevent damage to the LCD.

CHARGING THE BATTERY

LED STATUS



BATTERY

On.....	Charging
Blinking every 2 seconds.....	Fully Charged
Blinking every 1/2 second	Error



2. The **RIBBON CARTRIDGE**

INSTALLING THE RIBBON CARTRIDGE



Ribbon Cartridge



1. Open the *printer cover* by pulling the *cover release lever*.

► **NOTE:** Do not touch the *print head*. This could damage the print head and reduce print quality.




2. Orient the *ribbon cartridge* so the section of exposed ribbon faces up, toward the underside of the *LCD screen*.

3. Gently slide the *ribbon cartridge* into the side of the *printer* (avoid snagging or wrinkling the *ribbon*) until it snaps tightly and is flush with the side of the *printer*. Lock the *ribbon cartridge* in place by sliding the *locking tab*.


3. The SUPPLY SPINDLE

LOADING THE SUPPLY SPINDLE

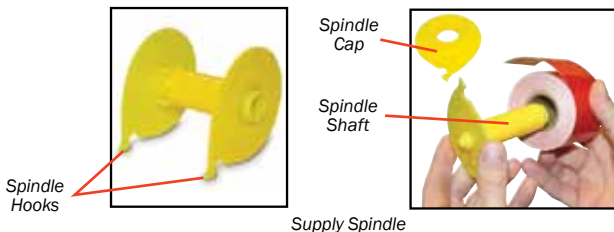

1. With the *printer cover* open, remove the *supply spindle* from the *printer*.
2. Grasping the two sides of the *supply spindle*, gently pull it apart.
3. Slide the supply over the *spindle shaft* making sure it unwinds in the direction indicated by the arrows on each side of the *supply spindle*.
4. Replace the *spindle cap* on the end of the *spindle shaft* by pressing the ends together until they touch the supply roll, making sure the *spindle hooks* are aligned.


INSTALLING THE SUPPLY SPINDLE IN THE PRINTER

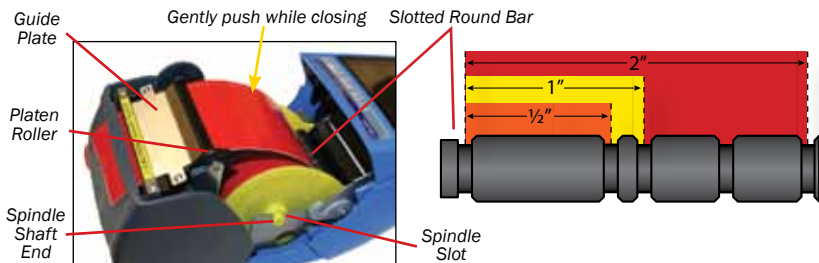

1. To secure the supply, place the *spindle hooks* in the corresponding slots on the *slotted round bar*, as seen in the diagram above.
2. Press the *spindle shaft ends* into the *spindle slots*.
3. Insert the end of the supply between the *platen roller* and the black strip of the *guide plate*, pushing it through the slot at the top of the *printer cover*.
4. Carefully close the *printer cover* without pinching the supply inside, and lock it in place with the *cover release lever*.

► **NOTE:** Once the *printer cover* is closed, the *printer* determines the width of the supply, and the supply is aligned for printing labels.

4. The **PRINTER INTERFACE**

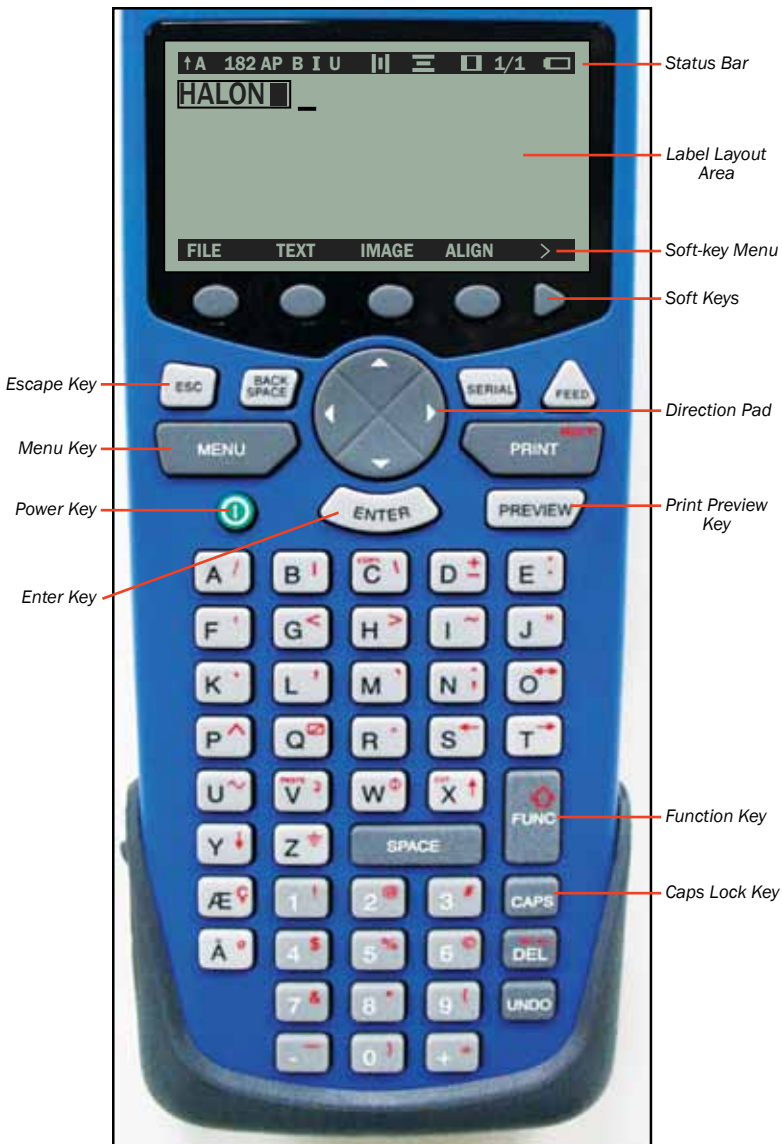


5. MAKING LABELS




Finished Label



Red 2" Premium Supply and White Ribbon Cartridge


1. From the main menu..... **MENU**
2. Enable the bold setting..... **TEXT BOLD**
▶ **NOTE:** When enabled, a small box appears to the right of the menu option.
3. Type the label text HALON
4. Return to the main menu **MENU**
5. Insert an image **IMAGE**  **ENTER**
▶ **NOTE:** The image appears on the edit screen as a black place-holder.

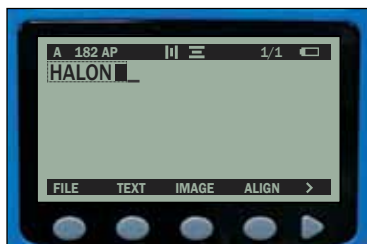

6. Advance to the next line..... **ENTER**
7. Disable the bold setting **TEXT BOLD**
8. Change the text size to 30 pt **SIZE** 30
▶ **NOTE:** The auto-size indicator "A" disappears when the size is manually entered.

5. MAKING LABELS cont.

9. Return to the edit screen..... **MENU**
10. Type the label text..... FIRE SYSTEM 7A
11. Preview the label..... **PREVIEW** 

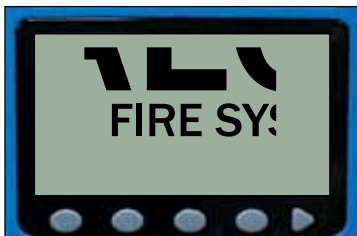

12. Print the label **PRINT**


► **NOTE:** After printing, cut the label by pulling the red cutter lever.



6. SAVING LABELS

1. From the main menu **MENU**

2. Save the label by creating a new label **FILE NEW**

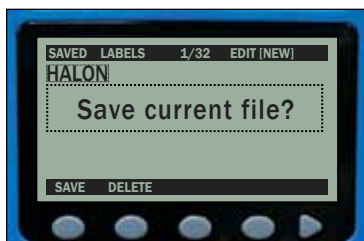


3. Save the label **SAVE**



4. Type the label name HALON **ENTER**

► **NOTE:** The label is saved and a blank edit screen appears.

7. The EDIT SCREEN

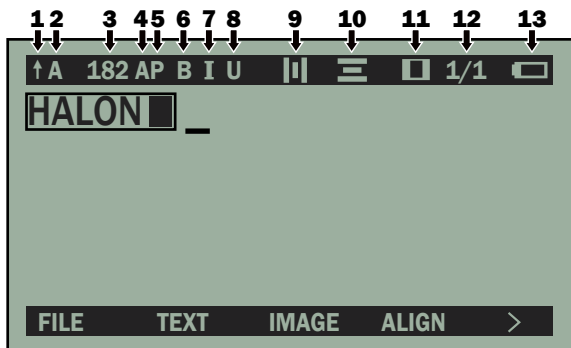See the explanation of the numbered items below the image.



1. Red key definitions active..... 
2. CAPS lock..... 
 - A (on) a (off)
3. Size..... **TEXT** **SIZE**
4. Auto-size..... **TEXT** **SIZE** **AUTO**
5. Unit..... **TEXT** **SIZE** **UNITS**
 - P (point size) % (percent of label)
 - " (height in inches) M (height in millimeters)
6. Bold..... **TEXT** **BOLD**
7. Italic..... **TEXT** **ITAL**
8. Underline..... **TEXT** **UNDER**
9. Vertical alignment..... **ALIGN** **VERTICAL**
 - !| (top) |! (center) !| (bottom)
10. Horizontal alignment..... **ALIGN** **HORIZONTAL**
 - ≡ (left) ≡ (center) ≡ (right)
11. Border..... **>** **BORDER**
 - (thin) ■ (wide)
12. Line number over label line count
13. Battery life remaining

8. The IMAGE LIBRARY

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100
101	102	103	104	105	106	107	108	109	110
111	112	113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128	129	130


131	132	133	134	135	136	137	138	139	140
141	142	143	144	145	146	147	148	149	150
151	152	153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168	169	170
171	172	173	174	175	176	177	178	179	180
181	182	183	184	185	186	187	188	189	190
191	192	193	194	195	196	197	198	199	200
201	202	203	204	205	206	207	208	209	210
211	212	213	214	215	216	217	218	219	220
221	222	223	224	225	226	227	228	229	230
231	232	233	234	235	236	237	238	239	240
241	242	243	244	245	246	247	248	249	

To get the most out of your **DuraLabel 2000**, optional accessories may be ordered upon request. Call Graphic Products at **1-800-788-5572** for details or visit **www.duralabel.com**

DL2000 Soft Case



DL2000 Hardshell Case



Supply Spindle



Rechargeable Battery



Cleaning Cards and Pen



Battery Charger



Ribbon Cartridge - in white, red, blue, yellow, green, and black.



Premium Supply Tape - in 1/2", 1" and 2" rolls in white, red, blue, yellow, green, orange, black, and clear.



Two-Color Premium Supply Tape - in 1" and 2" rolls, white, with pre-printed red and orange stripes.



Self-Laminating Wire Wraps - in 2" x 1/2" and 1" x 1/4" rolls in white, red, blue, yellow, green, orange, and magenta.

